

SKIDSENS

Fouling Sensor

by Neosens



Key Features

- Real-Time Monitoring
- Controller Triggered Alerts
- Confirmation of Treatment Results and Effectiveness
- Simple 4-20mA Output
- Reduced Operating Costs
- Extended Equipment Life

Fouling Control

Neosens' Skidsens offers an innovative, cost effective sensor solution for monitoring the presence of fouling by biofilm or scale in cooling towers and other recirculated water applications.

Fouling in cooling systems is a multibillion dollar problem, reducing energy efficiency, increasing maintenance costs and creating health risks.

The Neosens approach is early, preventative, online monitoring with the signal going to a web capable monitor like the MegaTron. The sensor and controller continuously monitor the thickness of fouling within the process enabling the optimization of treatment and confirmation of the treatment's effectiveness.

Core Technology

The SKIDSENS Series sensor utilizes a patented thermal analysis technique for measuring changes in local thermal conductivity and heat transfer due to fouling of just a few microns in thickness. The sensors are based on MEMS (Micro-Electro-Mechanical Systems) technology, which offers the integration of electrochemical sensors and control electronics on a common silicon substrate.

BUILD A MODEL

SKIDSENS - _____


Mounting Options

(See layout diagram below)

- A = No tee
- B = 3/4" quick release PVC slip tee
- C = 3/4" quick release PVC 90 (gray)
- D = 3/4" quick release PVC 90 (clear)
- E = 1" male slip PVC quick release fitting

Power Supply

- 1 = No power supply
- 2 = External 100-240 VAC to 36 VDC power supply (with USA cord)
- 3 = External 100-240 VAC to 36 VDC power supply (no cord)

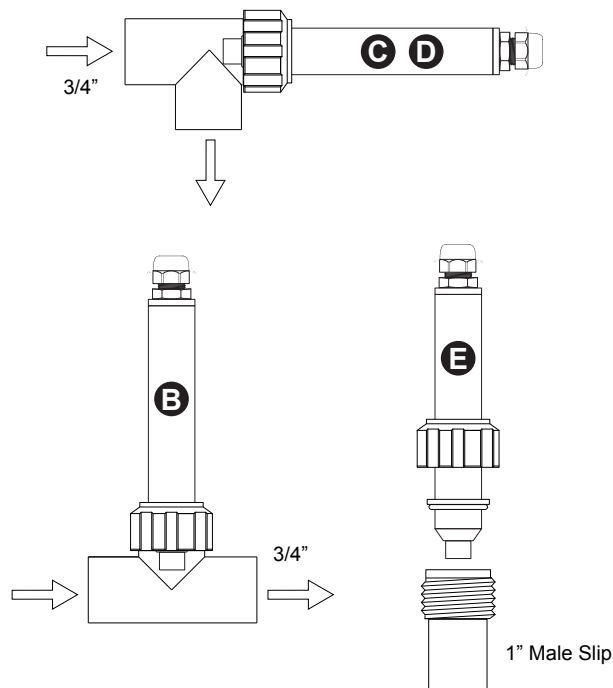

Specifications

Electrical:

- Input: 36 VDC @ 60mA
- Output: 4-20mA (500 Ω) max

Environment:

- Ambient temperature - 0 to 140°F (60°C)
- Relative humidity - 0 to 100%
- Pressure - 80 PSI (5.51 bar) max
- Flow - 3.5 GPM (13.24 LPM)

Fouling Monitoring: 0-1 mm (0.039 in) min.

Accuracy: 1% of Full scale

Material: PVC & 316L SS

Sensor Length: 7.5" (19.05 cm)

Installation Requirements

- SKIDSENS sensors have been designed for easy installation in recirculating water loops with a minimum flow rate of 3.5 GPM.
- The 4-20mA output is a differential output referenced to the +36V supplied power and works best with isolated input sensing devices.
- Power supply converter housing dimensions:
W 7.5" (19.05 cm)
H 7.5" (19.05 cm)
D 5.875" (14.923 cm)

Controller Compatibility

The SKIDSENS sensor can connect directly into a MegaTron or MegaTron SS controller with the 4-20mA input card option. Historical graphs, real time readings and email alarm notifications can be done when the controller is connected to the internet and the WebAdvantage.



Get the Advantage



4700 Harold Abitz Dr
Muskogee, OK 74403
800-743-7431 phone
888-686-6212 fax
www.advantagecontrols.com