


BTP

Boiler Trace Sensor Panel

Panels includes the following items mounted on a 1/2" blue pvc panel:

- LBC-SS sample cooler
- Pressure relief valve on cooled sample
- NFC-1/2 throttling valve on boiler water inlet
- Cold water inlet has no automatic valve, cold water will always run through sample cooler
- Non-electric sample temperature shut-off valve
- PVC plumbing after the sample cooler is only rated to 100 psi at 120°F
- Desired controller and trace sensor to be ordered as separate line items

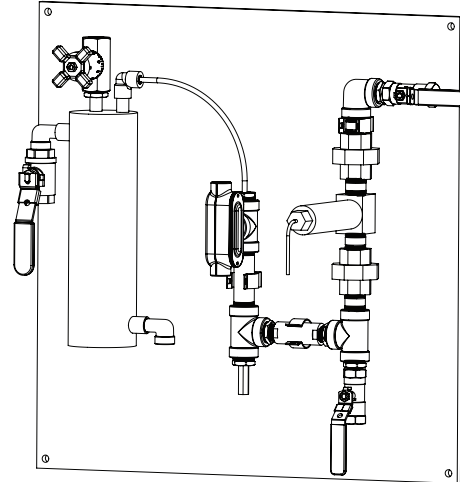

Model Numbering

BTP - - -

Board

- 00 = Plumbing only, no panel
- 05 = Board with no space for controller (32"H x 26"W)
- 10 = Board with space for controller (32"H x 38"W)

Inlet Boiler Water Valve Shut-Off

- X = No inlet sample shut-off
- 30 = MBWB-1/2 motorized ball valve (450 psi max)
- 60 = SOB-1/2 solenoid valve (140 psi max)
- 70 = SOB-1/2 solenoid valve on cooled sample outlet

Additional Probe Tees

- X = No cooled sample sensor tees
- 1 = One 3/4" SS conductivity probe tee, mounted vertical
- 2 = Two 3/4" PVC quick release probe tees, mounted horizontal
- 3 = Three 3/4" PVC quick release probe tees
- 4 = Two 3/4" SS tees
- 5 = Three 3/4" SS tees

Options

- A = Isolation valve on cold water inlet to sample cooler
- C = Cold water solenoid valve SO-1/2-P in inlet to sample cooler
- D = No sample cooler
- F = Low flow paddle switch in 3/4" PVC tee
- R = Mounting rails
- S = Indicates BTP is to be mounted on separately ordered BVS pre-fab
- T = LD2 trace sensor tee only plugged (not needed if sensor is on order)
- T1 = Pyxis trace sensor tee only plugged (not needed if sensor is on order)
- W = Free standing legs