

LD2-Check

Handheld Little Dipper™ Fluorometer
by Turner Designs

Portable Fluorometer Measurements



Key Features

- Dustproof, watertight, highly durable case
- Small size easily fits in shirt or jacket pocket
- Operates using AA batteries for >10,000 measurements per set
- PTSA
- Single-point plus blank calibration
- 10 bit resolution
- 5 second warm up
- Low maintenance field fluorometer

Application

The Turner Designs LD2-Check is a small, lightweight, highly durable handheld fluorometer ideal for quick measurements in the field.

LD2-Check tester is available in two different models:

- PTSA (LD2-CHECK-A)

Simple to operate, the LD2-Check is a perfect tool for system verification.

Industrial Water Process Control for:

- Cooling Towers
- Boilers
- Others

Models: LD2-CHECK-A for PTSA



Instruction manuals can be found here:
<http://www.advantagecontrols.com/downloads.php>

Ask about our other portable testers:

- HanTron conductivity tester HT-3P
- HanTron signal simulator HT-SIM-MOP simulates pH, ORP and 4-20 mA readings.

HT-3P



HT-SIM-MOP



Specifications

Linear Range

- 0-200 ppb typical for PTSA

Sensitivity

- 1ppb typical for PTSA

Temperature

- 41° - 104°F (5° - 40°C)

Power

- 2 AA batteries

Warm-up Time

- 5 seconds

Case

- IP 67 standard; dustproof / waterproof

Light Source

- LED

Detector


- Photodiode

Dimensions

- 8.9"x 2"x1.75" (22.6 x 5.1 x 4.5 cm)

Shipping Weight

- Approx. 4.3 oz (120 g)

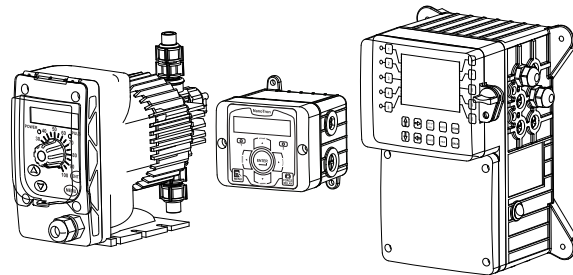

Advantage Controls offers a complete line of water treatment controls and feed equipment. We look forward to helping you *Get the Advantage* on all of your water treatment equipment needs.

Get the Advantage



4700 Harold Abitz Dr
Muskogee, OK 74403
800-743-7431 phone
888-686-6212 fax
www.advantagecontrols.com