


Pump Injection Accessories

**SS Quill Assemblies • 316 SS Injection Quills • Corporation Stops
Static Mixers • Valves • Quick Release Injection Tees & Manifolds**

Stainless Steel Quill Assembly

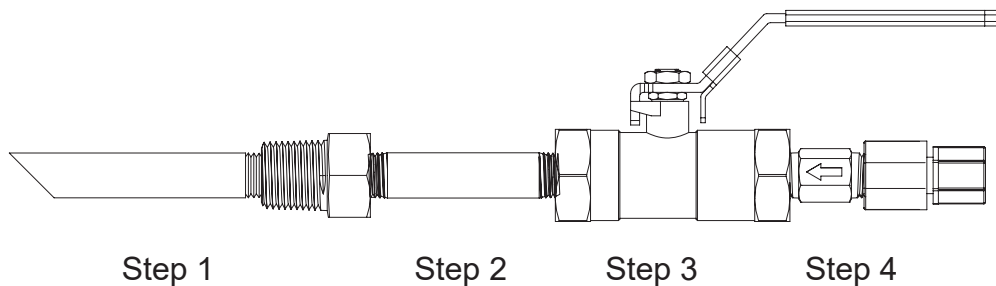

1/2" SS MNPT (1,000 psi)

		ASQ -	
Injection Quill Length	_____	(Step 1)	_____
X = No quill			
3 = 3" quill (1000 psi)			
6 = 6" quill (1000 psi)			
Heat Dispersion Length	_____	(Step 2)	_____
A = 3" SS pipe MNPT, 1/4"			
B = 6" SS pipe MNPT, 1/4"			
C = 12" SS pipe, MNPT, 1/4"			
Isolation Valve, SS	_____	(Step 3)	_____
X = No valve			
1 = 1/4" valve 300 psi @ 300°F			
Back Check and Connection	_____	(Step 4)	_____
X = No check			
1 = PVDF, Teflon, ceramic ball, dual checks, 3/8" tubing, 200°F @ 250 psi			
2 = PVDF, Teflon, ceramic ball, dual checks, 1/4" tubing or FNPT, 200°F @ 250 psi			
3 = SS, Teflon, SS ball, single check, 1/4" MNPT, 250°F @ 500 psi			
4 = SS, Teflon, SS ball, single check, 1/4" tubing compression, 250°F @ 500 psi			
5 = No check with SS 1/4" tubing compression fitting			

Injection Accessories

Corporation stops are for injection into larger pipes or tanks and allow removal of injector while under pressure.

Injection quills to inject chemicals into high pressure or high temperature applications like boiler water and steam lines.

Quick release PVC injection tees or manifolds for quick inspection and cleaning of pump injection assemblies.

Injection Quills

Injection quills have 1/2" NPT connections and include a built-in SS ball check and are rated to 2000 psi.

- A3J6** 3" quill, 316 stainless steel
- A6J6** 6" quill, 316 stainless steel

Corporation Stops

Corporation stops have 3/4" MNPT for connecting into the process pipe and 1/2" FNPT for connecting onto the injection tube.

- ACJC** PVC Corp. stop, 100 psi
- ACJC4** 304 SS Corp. stop, 100 psi
- ACJC6** 316 SS Corp. stop, 100 psi

Check Valves

- R00325** 1/2" MNPT SS
- CKV-1/2-SS** 1/2" 304 SS

Quick Release Injection Manifolds

Quick release injection manifolds have 3/4" slip inlet and outlet connections and a 1/2" FNPT collar for pump injection valve.


- INJ-1** 1 stage injection manifold, PVC, 3"
- INJ-2** 2 stage injection manifold, PVC, 7"
- INJ-3** 3 stage injection manifold, PVC 11"
- INJ-4** 4 stage injection manifold, PVC 15"
- INJ-11** 1" PVC slip tee assm. w/ 1/2" collar, 3 5/8"
- INJ-11-CPVC** 1" CPVC injection tee with 1/2" port
- INJ-COL** Injection collar

Static Mixers

Static mixers are made of Sch.80 120PSI @ 125°F PVC with 3/4" FNPT union connections and a clear body.

- SM-7** 7 stage static mixer, 4.5" long, 3/4"
- SM-14** 14 stage static mixer, 9.5" long, 3/4"
- SM-14-1** 14 stage static mixer, 9.5" long, 1"
- SM-14-1P** 14 stage static mixer, 9.5" long, 1" (non-clear)

Advantage Controls offers a complete line of water treatment controls and feed equipment. We look forward to helping you *Get the Advantage* on all of your water treatment equipment needs.

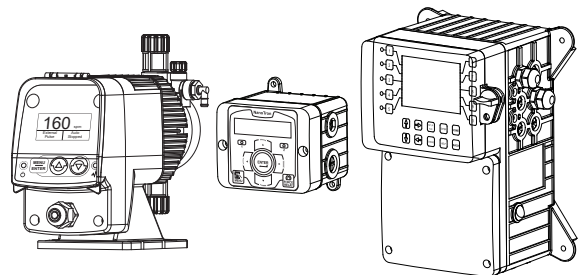

Get the Advantage



4700 Harold-Abitz Dr
Muskogee, OK 74403
800-743-7431 Phone
888-686-6212 Fax
www.advantagecontrols.com